

WHAT TO DO WHEN BOTH VAULTS ARE FULL.

A.



Do I need any tools?

You will need :

- A Cloth (clean and damp)
- Gloves
- A spade
- A hoe
- A large plastic or a Hessian bag (or sack)

B.

How do I prepare?

Dig a hole one spade wide by one spade long by half a spade deep.

Keep the soil because you are going to use it.

C.

How do I clean out the vault?

Put the Hessian bag under the opening at the back of the first vault.

Open the back cover to the vault which is to be emptied.

Put on gloves to protect your hands.

Use your hoe or rake to remove the waste material out of the vault and onto the hessian bag.

Drag the bag to the hole and then use your spade to shovel the waste material into the hole.

Keep on repeating until the vault is empty.

Rake together any contents from the vault that has dropped on the ground around the toilet and place in the hole.

D.

Do I need to do anything afterwards?

Use the soil you dug out earlier to fill the hole and make a mound on top of the filled hole.

Walk over the soil until it is flat and hard.

Plant grass or a tree on top of the hole.

Tidy up around the toilet structure.

Replace the back cover to the vault.

E.

Now that the vault is empty what must I do?

You need to move the pedestal and place it over the vault which you have emptied.

Take the plastic floor cover off the first vault.

Put the plastic cover in a safe place.

Move the pedestal back over the first vault (this is described at the beginning of the pamphlet).

Put the cover over the full vault.

Clean up, wash tools and the toilet pedestal and then wash your hands with soap.

**Toll free number:
080-13-13-013**

WHAT TO DO WITH A FULL UD TOILET VAULT.

1.



What must I do when the first vault is full?

You will need to move the pedestal and place it over the second vault.

Why must the toilet pedestal be moved?

The toilet pedestal must be moved so that the second vault can be used while the contents of the full vault are allowed to dry.

2.

How do I move the toilet pedestal?

Stand in front of the toilet and hold the toilet pedestal on each side. Gently move it and pull it out of the floor. Remove the vault cover from the empty vault and put it in a safe place. Now you need to check the pipes.

How do I check the pipe work?

The pipes for the first and second vault are joined. Pour a cup of water into the urine pipe to check that it is not blocked. If the water does not go down, the pipe needs to be unblocked.

If the pipe is blocked, how can I unblock it?

Pour water into the pipe and at the same time GENTLY push a piece of wire into the hole to try and move the blockage. If the pipe is too badly blocked, then you must call 080-13-13-013 and ask for help.

3. You are now ready to move the toilet pedestal. This is what you do.....

Put the toilet pedestal over the empty vault so that the toilet lid opens towards the wall.

Check that the pipe work of the toilet pedestal fits into the pipe work (that you have checked) in the floor.

Gently push downwards so that the toilet fits well over the empty vault.

Replace the vault floor cover over the full vault.

4. Check that the pipe work is properly connected – pour a cup of water into the urine pipe (the front part of the toilet) and ask someone to look at the back of the vault. You should not see any water coming out. If there is water outside, the pipe work may not be correctly joined. Then you need to join it properly.

Your toilet is now ready for use again until the second vault is full.

It is important to keep things clean. When you have finished, you need to wash :

- The toilet pedestal
- Around the toilet
- Your hands with soap.



**ETHEKWINI
MUNICIPALITY**
WATER SERVICES


HOW TO CHANGE VAULTS A




Wash your hands with soap.



D. Plant grass on the covered hole and tidy up around the toilet structure.

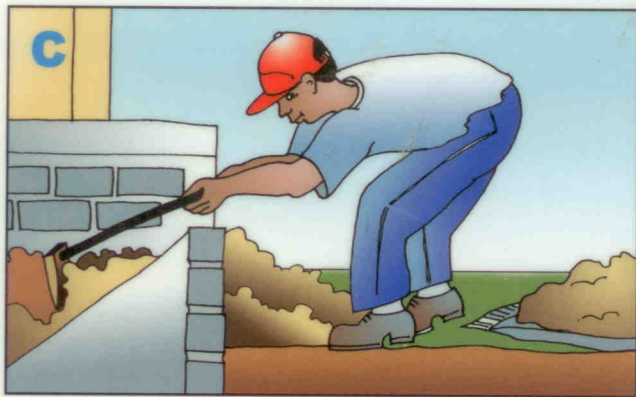


C. Empty the contents of the vault into the hole dug in the ground.

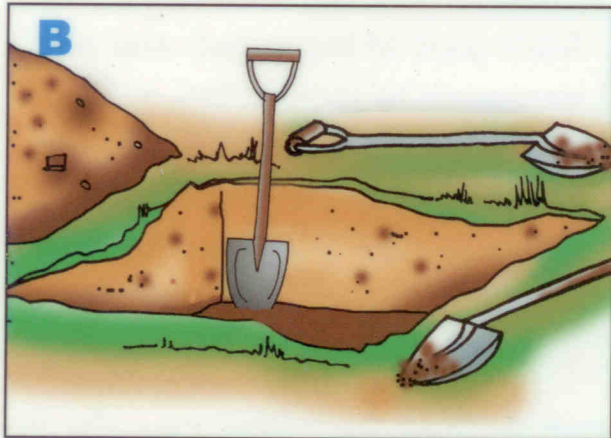

B. Dig a hole one spade long, by one spade wide, by half a spade deep.



A. Tools that are needed to empty the toilet vault.

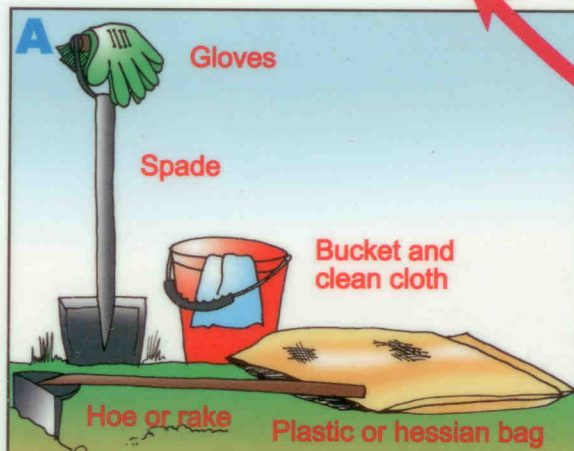

HOW TO USE AND EMPTY YOUR UDD TOILET



What do I do when the first vault is full?

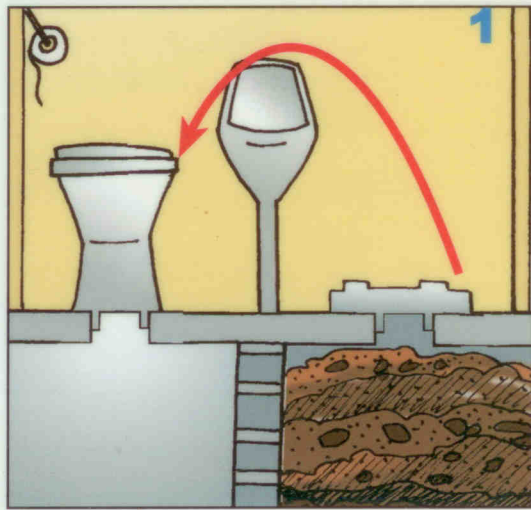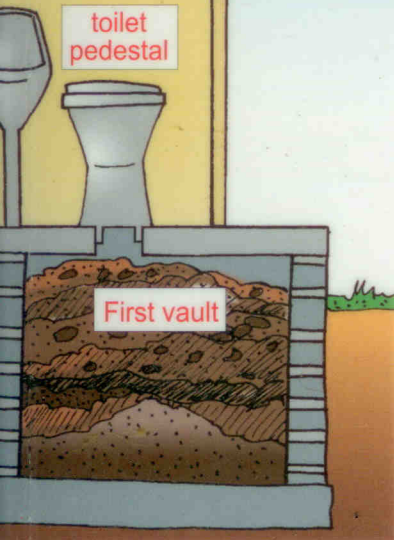

1. Move the toilet pedestal over the second vault.




Wash your hands with soap.



2. Clean the pedestal and the area around it.

3. Make sure the pedestal fits tightly over the second vault.

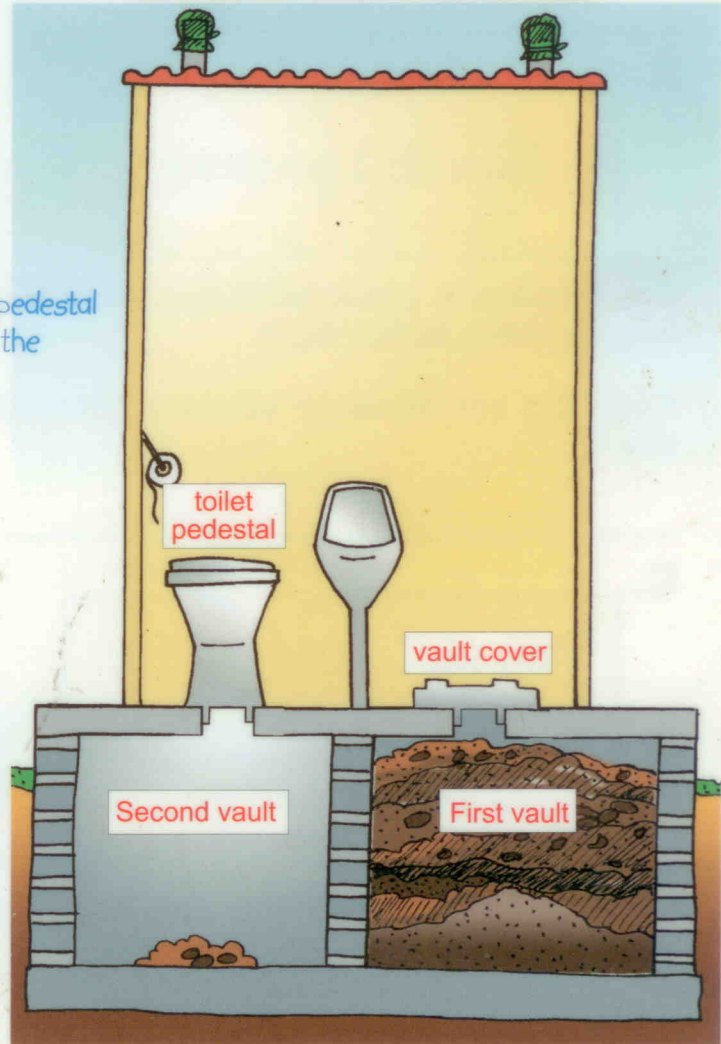

4. Check that the pipes are connected correctly.



What do I do when the second vault is full?

